



Ordering Guide:

C5362D: LUMINAIRE  
 SA7934: WRAPAROUND BASE  
 SA7934A: CENTER HUB  
 SP7934F: POLE

Color:  
 Green

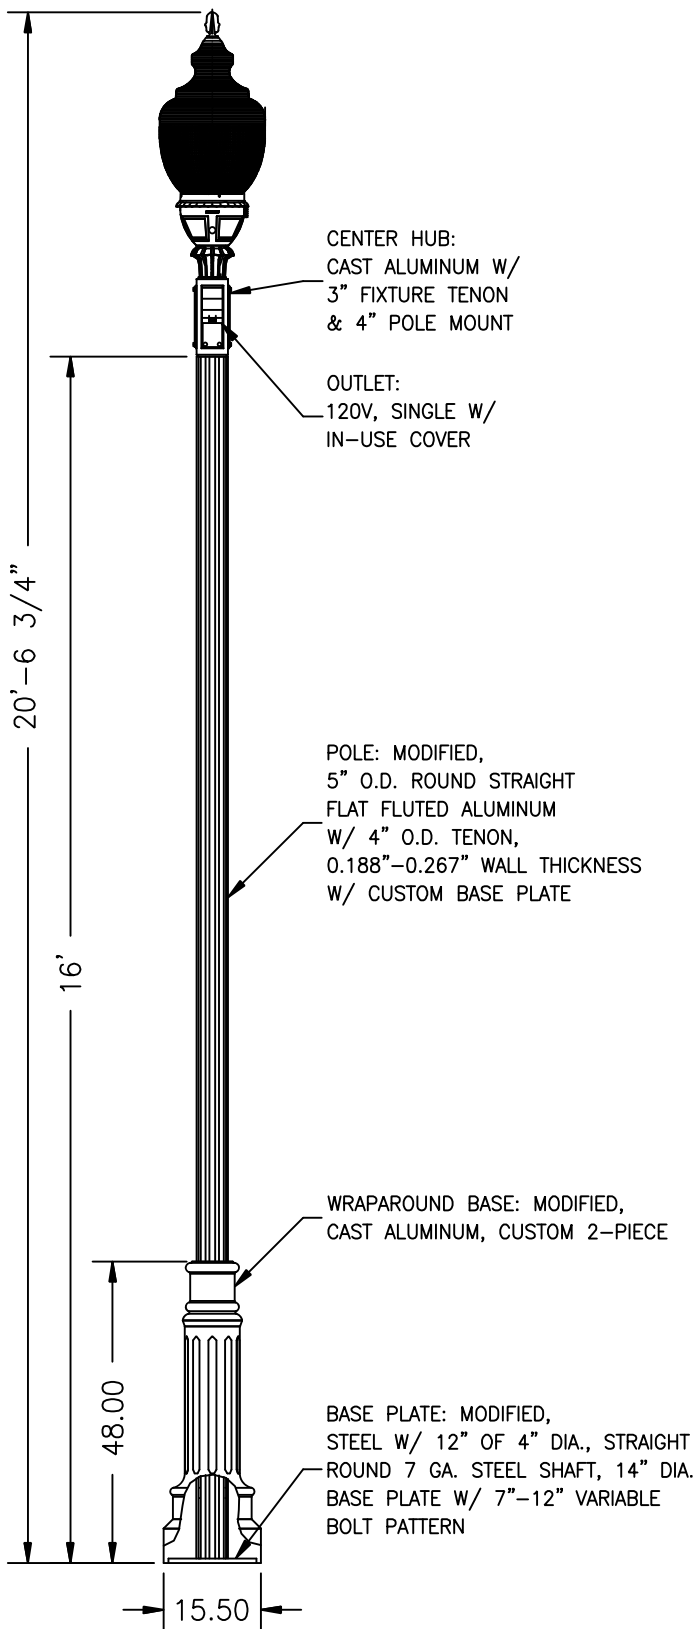

Luminaire  
 Detail  
 Scale 1:16

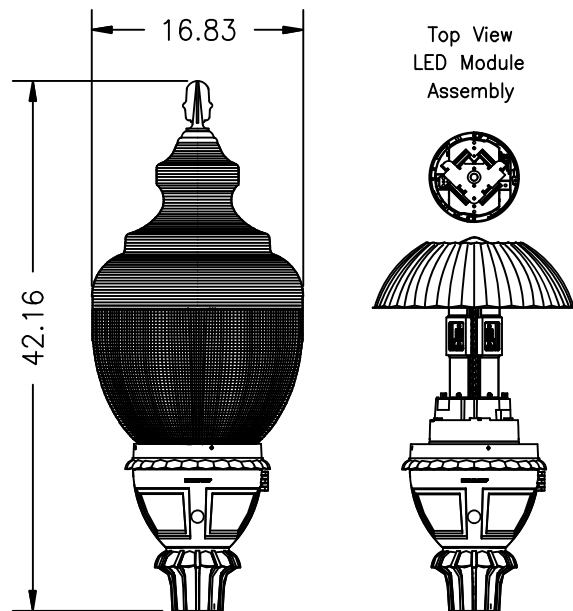

FASTENERS:  
 X HEX HEAD BOLTS  
 \_ ALLEN HEAD SCREWS

COLOR:  
 \_ BLACK  
 \_ WHITE  
 \_ VERDE  
 \_ BRONZE  
 X GREEN

PHOTO CONTROL:  
 \_ 120 VAC BUTTON-EYE  
 \_ 208/240/277 VAC BUTTON-EYE  
 X TWIST-LOCK RECEPTACLE  
 \_ NONE

DIMMING CONTROLS:  
 \_ 4 HRS. 25% REDUCTION  
 \_ 4 HRS. 50% REDUCTION  
 \_ 4 HRS. 75% REDUCTION  
 \_ 6 HRS. 25% REDUCTION  
 \_ 6 HRS. 50% REDUCTION  
 \_ 6 HRS. 75% REDUCTION  
 \_ 8 HRS. 25% REDUCTION  
 \_ 8 HRS. 50% REDUCTION  
 \_ 8 HRS. 75% REDUCTION  
 \_ CUSTOM DIMMING SCHEDULE  
 X NONE

Lumilock LED Specifications:

- 80, 4000K (neutral) Philips Lumileds Luxeon T LEDs, typical 75 Color Rendering Index (CRI), >60,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), aluminum core pcb, sealed glass lens, IP66 rated, type V light distribution.
- Integral Philips Advance Xitanium LED driver, class 1, IP66 rated, 350mA, 0-10V dimming, IntelliVolt 120-277 VAC, 50-60 Hz, RoHS compliant, field replaceable 10kV/10kA surge suppression.
- UL8750 & UL1598 compliant, ETL & cETL listed to U.S. & Canadian safety standards for wet locations, manufactured to ISO 9001:2008 Standards.

PRODUCT APPROVALS

HADCO	SDK
CUSTOMER	

CONFIDENTIAL:

This drawing is confidential and proprietary to Philips Hadco and may not be reproduced without the express written consent of Philips Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Philips Hadco.

NOTICE:

This drawing is for reference only. Check for latest revision prior to ordering.



100 Craftway Drive  
 Littlestown, Pa 17340  
 Phone 800-331-4185  
 Fax 717-359-9289  
 www.philips.com

JOB NAME:

City of  
 New Rochelle

DRAWN BY:

H. Kuhn

SCALE:

1:32

DATE:

01/27/16

DRAWING NUMBER:

C5362-DWG14

REP:

Dave Murphy

REV: A

PCN: 16-001

BY:

DATE: